


P10 Series Label Printing Scales

General Specifications

- | | |
|------------------|--|
| • Display | 10.1" colour touch screen operator display
10.1" colour customer display for advertising and promotions |
| • Capacities | 6kg~30kg |
| • Pan size | 280 x385mm |
| • Housing | ABS plastic |
| • Max. Divisions | 2 x 3,000e |
| • ADC update | ≤1/10 second |
| • Operate Temp | 0°C ~+40°C |
| • Power | In put : AC 100~240V,50/60HZ
Out put : DC (24V/5000mA) |

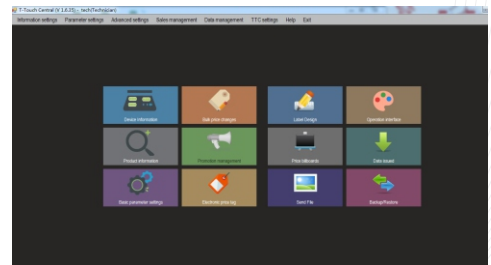

T-Touch Central

- Standard TOS II embedded Operating System(1.2GHz)
- Optional WIN PC version
- Stainless steel pan
- PLU product management
- Sleep function
- Multi-weighing units selection
- Single labeling and Pre-Pack mode operation
- Standard 2*RS-232 interface can connect to computer and printer
- Standard 1*RJ11 interface support DC 12V cash drawer
- Standard 2*USB2.0 interface can connect to USB disk, Barcode Scanner, Mouse and Keyboard
- Standard 1*RJ45 interface support 10M/100M Ethernet
- Standard 1*Mini USB for core software update
- Optional WIFI application
- OIML approval form Delta(approval no.DK0199.516)
- Built-in cassette type label printer(width:60mm),support print label and receipt
- TTC Back Office Software Management allows to make product update, create customized print format and UI(operator interface),data import&export,etc.

P10 Series Label Printing Scales

Model Name	Capacity	Readability	Division	Approx. weight	Approval
P10-15-15K-MR	6kg/15kg	2g/5g	2x3,000e	12kg	CE, OIML,NTEP
P10-15-30K-MR	15kg/30kg	5g/10g	2x3,000e	12kg	CE, OIML,NTEP

Options



Dimensions(mm)

